

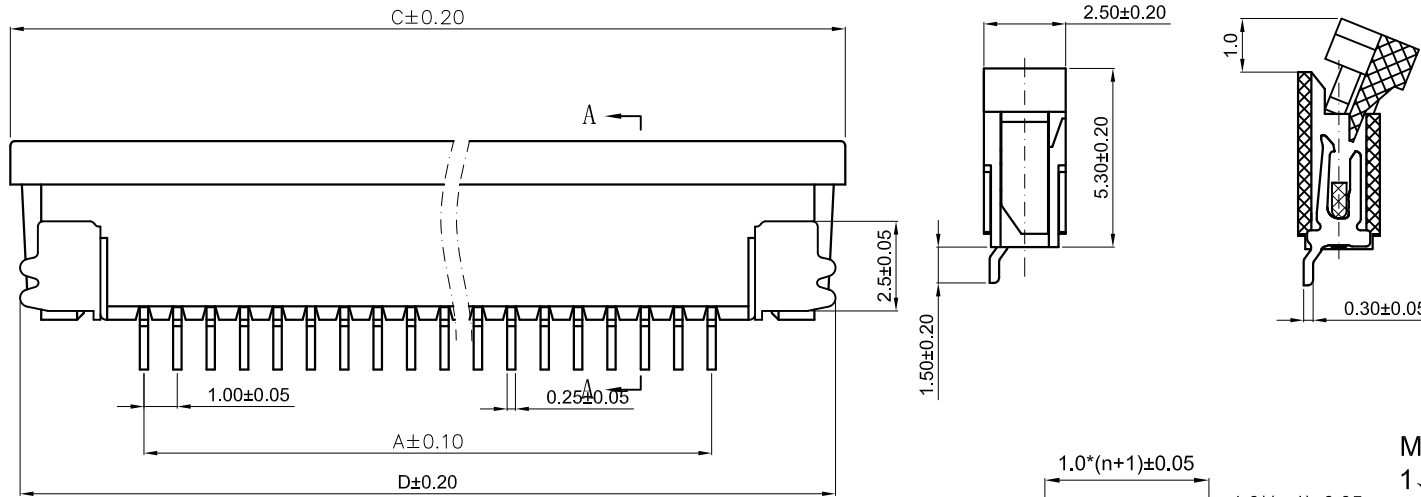


40 PINS 1.0 Pitch SMD Horizontal Type Bottom Contact

| Ver | Date | Description |
|-----|-------------|---------------------|
| 1.0 | Apr-19-2013 | Preliminary Release |

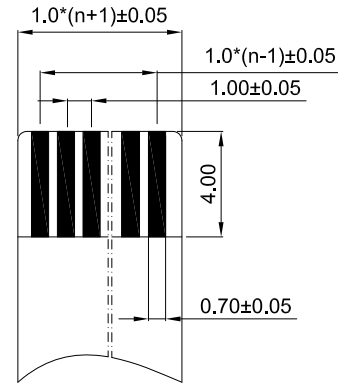

| Pin Num | A | B | C | D |
|---------|------|------|------|------|
| 40 | 39.0 | 41.3 | 47.1 | 46.1 |

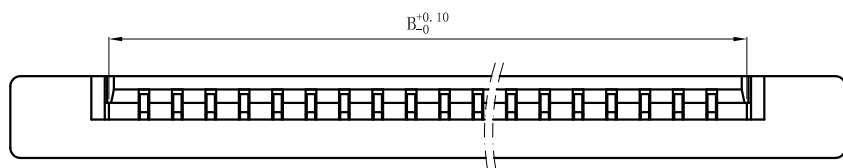


Material:

- 1、 Housing: NYlon46 UL94V-0 Grey;
- 2、 Loeker: PPS UL94V-0;
- 3、 Contact: Phosphor bronze, tin/lead-plated;
- 4、 Solder tab: Phosphor bronze, tin/lead-plated.

Specification:

- 1、 Unverified Tolerance should comply with SJ1372-79;
- 2、 Temperature Range: -25°C~85°C;
- 3、 Rated Voltage: 50V, AC, DC;
- 4、 Contact Resistance: ≤0.03 Ω;
- 5、 Insulation Resistance: ≥500M Ω;
- 6、 Withstand Voltage: 500V, AC/minute.

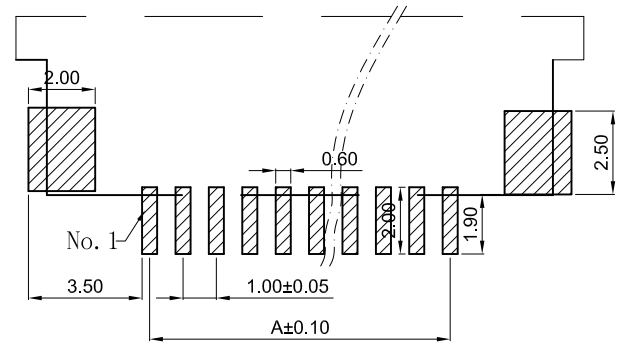

| | | |
|---|---|-------------------|
|  <p>旭日东方科技有限公司 EastRising Technology Co.,Ltd. buydisplay.com</p> |  | CD |
| | UNIT: MM | SIZE: A4 |
| | SHEET: 1 OF 1 | |
| Part Number for Order: ER-CON40HB-2 | | |
| DRAWN BY : Jim | CHECKED BY: Tony | APPROVED BY : Liu |